

DSEEXTRA[®] BATTERY CHARGERS AND EXPANSION MODULES.



DSE123

LOAD SHARE LINES INTERFACE



The DSE123 is a Load Share Lines Interface Device designed to expand existing analogue load share systems. The DSE123 monitors existing load share lines and converts the analogue information into a digital format.

This process allows all existing control modules to communicate with the DSE5510 control modules when they are added to the system.

When DC power is applied to the interface device a status LED will illuminate. If the DSE123 cannot communicate with the DSE5510, the LED will flash to indicate a communication malfunction.

The device has been designed to work with both DSE and other manufacturers existing load share systems, providing that the system is being expanded with a DSE5510.

CONFIGURATION

The table below shows how the DSE123 interface needs to be configured depending on the existing load share system that is on site.

TYPE	DSE123 SWITCH POSITION					
	kW SHARE SETTINGS			Var SHARE SETTINGS		
	A	B	C	D	E	F
BARBER COLMAN	6	4	2	0	0	0
DEIF*	0	1	8	0	1	8
SELCO	2	2	8	0	0	0
WOODWARD	6	8	1	0	0	0

DEIF* includes VAr share lines

SPECIFICATION

DC SUPPLY

8V to 33V

MAXIMUM OPERATING CURRENT

150mA @ 12V 80mA @ 24V

DIMENSIONS

160.5mm x 77.5mm x 76mm
6.3" x 3.1" x 3"
DIN Rail mounted housing

INDICATIONS

LED lit steady – ON/OK
LED flashing – M.S.C. link lost

ENVIRONMENTAL TESTING STANDARDS

ELECTRO MAGNETIC CAPABILITY (EMC)

BS EN 61000-6-4
EMC Generic Emission Standard for the Industrial Environment
BS EN 61000-6-2
EMC Generic Immunity Standard for the Industrial Environment

ELECTRICAL SAFETY

BS EN 60950
Safety of Information Technology Equipment including Electrical Business Equipment

TEMPERATURE

BS EN 60068-2-2
Test Ab to 70°C
Test Ab to -30°C

VIBRATION

BS EN 60068-2-6
Ten sweeps in each of the three major axes
5Hz to 8Hz @ +/- 7.5mm

HUMIDITY

BS EN 60068-2-30
Test Db 95% RH @ 55°C for 12 hours

SHOCK

BS EN 60068-2-27
Three shocks in each of three major axes
15gn In 11mS

DEEP SEA ELECTRONICS PLC

Highfield House
Hunmanby Industrial Estate
Hunmanby, North Yorkshire
YO14 0PH England

TELEPHONE

+44 (0)1723 890099

FACSIMILE

+44 (0)1723 893303

EMAIL

sales@deepseapl.com

WEBSITE

www.deepseapl.com

Registered in England & Wales No.01319649

VAT No.316923457

DEEP SEA ELECTRONICS PLC THAILAND

TPI Tower, Lobby 3
Floor 27, 26-56 Chan New Road
Tungmahamek, Sathom
Bangkok 10120, Thailand

TELEPHONE

+66 (0) 2678 3028

FACSIMILE

+66 (0) 2670 6228

EMAIL

sales@dseplc.com

WEBSITE

www.deepseapl.com

DEEP SEA ELECTRONICS INC USA

3230 Williams Avenue
Rockford
IL 61101-2668 USA

TELEPHONE

+1 (815) 316 8706

FACSIMILE

+1 (815) 316 8708

EMAIL

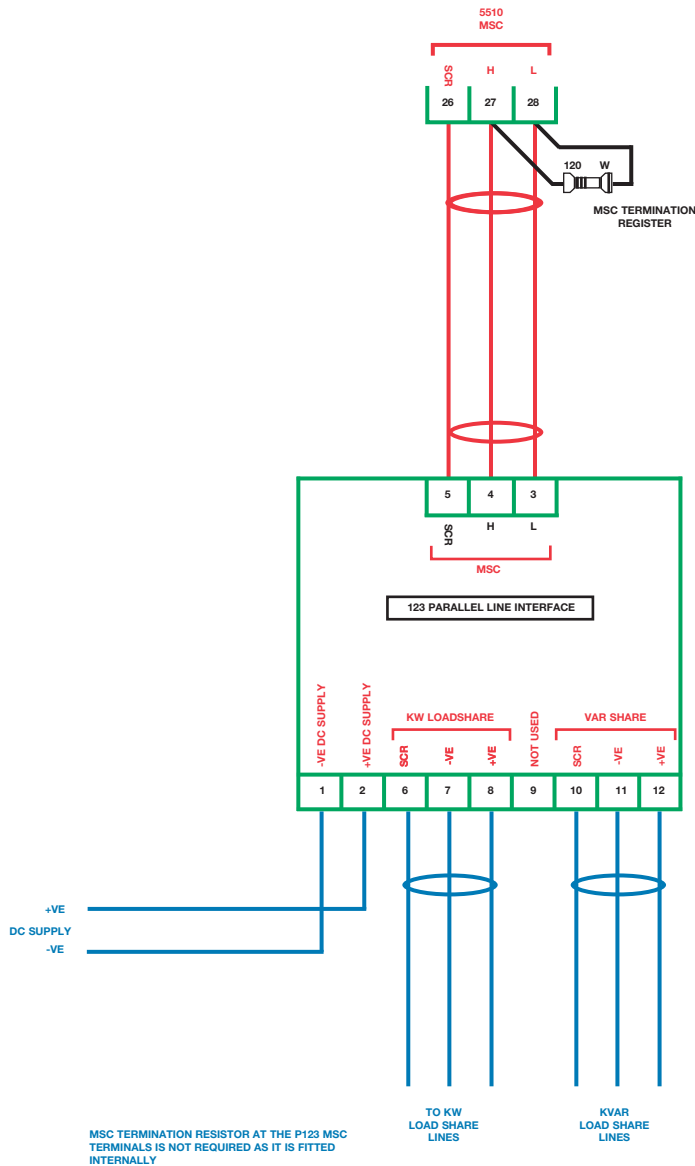
sales@deepseausa.com

WEBSITE

www.deepseausa.com



DSE123

**RELATED MATERIALS**

TITLE
DSE5510 Data sheet
DSE5510 Manual

PART NO'S
055-039
057-015

DEEP SEA ELECTRONICS PLC maintains a policy of continuous development and reserves the right to change the details shown on this data sheet without prior notice. The contents are intended for guidance only.

This data sheet is printed on 9lives 55 Silk, which is produced with 55% recycled fibre from both pre and post-consumer sources, together with 45% virgin ECF fibre.

